

NOTE:



1. TOLERANCES ON ALL DIMENSIONS ± 0.15 UNLESS OTHERWISE SPECIFIED.
 2. P.C.BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR MENTAIZATION.
 3. FINISH OF PAD:GOLD PLATING 0.00076MIN OVER ON PLATING 0.002MIN.
- ▲ DIMENSIONS APPLICABLE WHEN COMPONENTS MOUNTED ON BOTH SIDE.
PCB THICKNESS NOT TO BE EXCEEDED OUTSIDE OF COMPONENT AREA.
△ BORDER OF COMPONENT AREA.

RECOMMENDED MATING P.C.B CONFIGURATION

SMP TECHNOLOGY, INC.

DDR SO DIMM Socket, 204 Position, 1.5 Volt


Reverse Orientation, Right Angle, 8.0mm Height, Type 2

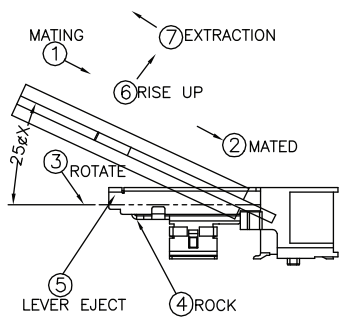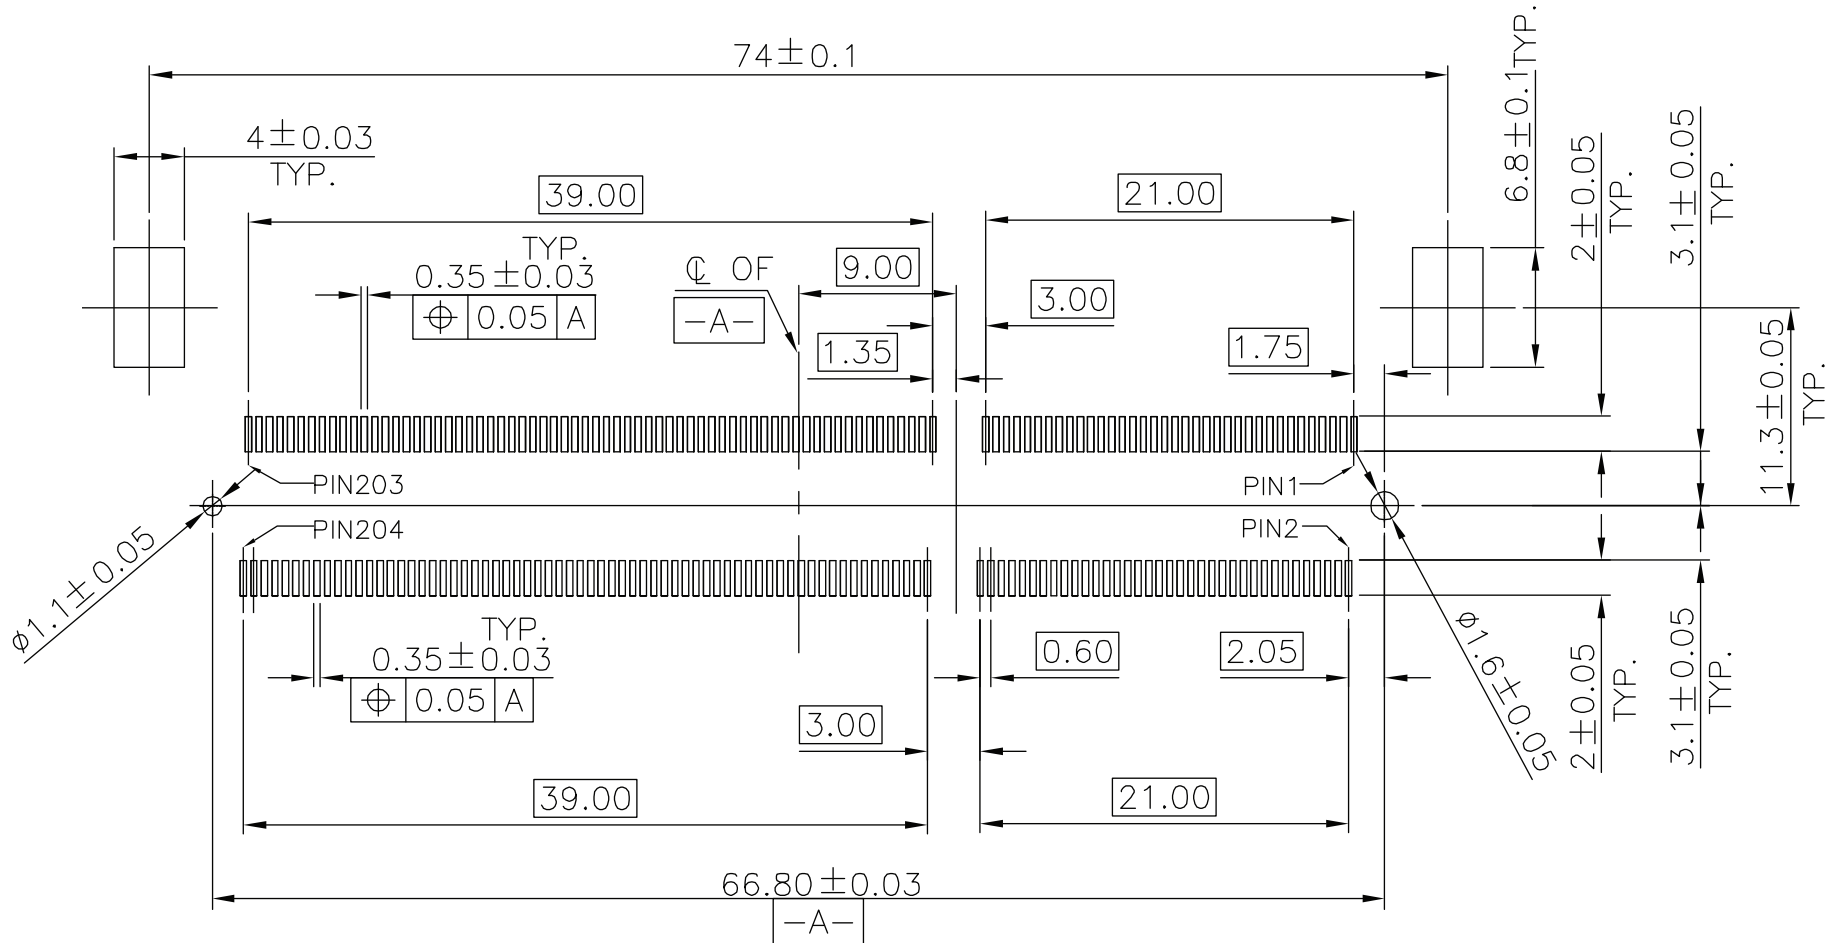





HOW TO MATE AND UNMATE
 MATE: ① → ④
 UNMATE: ⑤ → ⑦

RECOMMENDED PCB LAYOUT
 THICKNESS: 1.6±0.05mm

SMP TECHNOLOGY, INC.	
DDR SO DIMM Socket, 204 Position, 1.5 Volt	
Reverse Orientation, Right Angle, 8.0mm Height, Type 2	

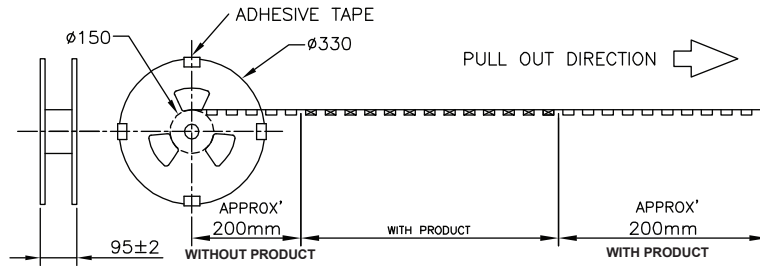

- NOTES:
1. PACKAGING MATERIAL IN PLASTIC, RUBBER, INK, PIGMENT AND MUST MEET CONTROLLED SUBSTANCES SPEC PER WI-PB-22.
* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED : 5 PPM.
* LEAD, CADMIUM, CHROMIUM VI AND MERCURY NOT TO EXCEED : 100 PPM (COMBINED)
 2. CARRIER TAPES, COVER TAPES, REELS AND TAPED COMPONENTS MUST MEET THE REQUIREMENTS DEFINED PER EIA-481-B.
 3. DIMENSION :
3.1 REEL : H = 95, $\phi A = 330$
3.2 SHIPPING CARTON : L = 335, W = 335, H = 248
 4. QUANTITY :
4.1 PRIMARY PACKAGING : 150PCS / REEL
4.2 SECONDARY PACKAGING : 2 REELS / CARTON (300PCS)
 5. WEIGHT :
5.1 NET WEIGHT : 1.58Kg / REEL, 3.16 Kg / CARTON.
5.2 GROSS WEIGHT : 2.03 Kg / REEL, 4.05 Kg / CARTON
 6. PEELING RESISTANCE : 0.1~0.7N (10.2gf ~ 71.4gf)
 7. PEELING SPEED : 300mm / MINUTE.

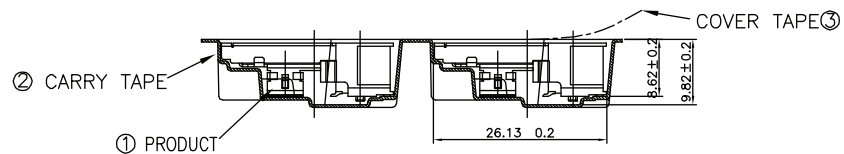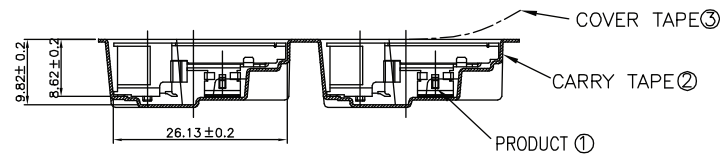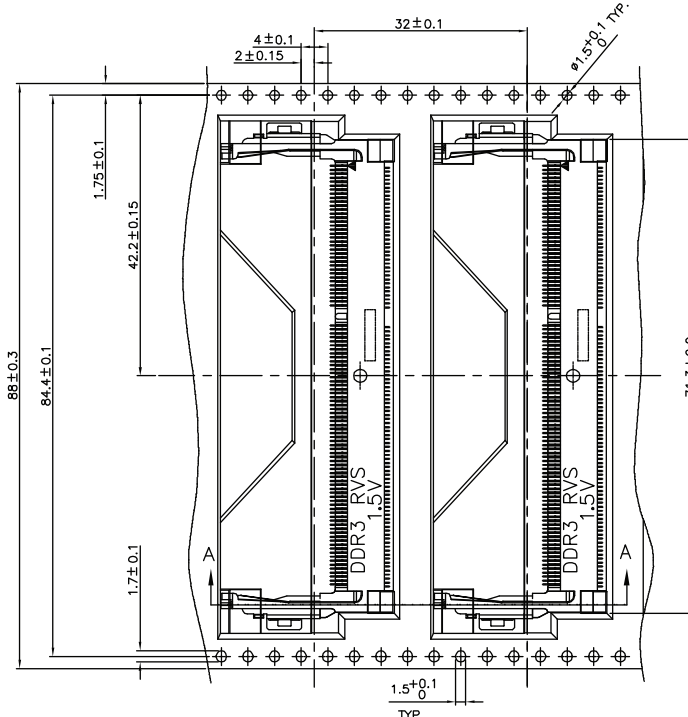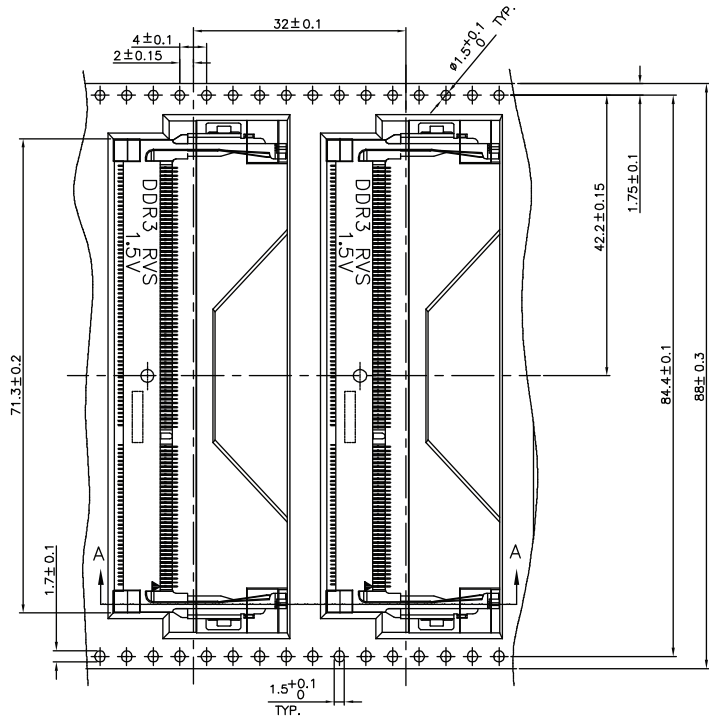






Section A-A
Packaging Direction: Tape & Reel Normal

Section A-A
Packaging Direction: Tape & Reel Reverse

SMP TECHNOLOGY, INC.

DDR SO DIMM Socket, 204 Position, 1.5 Volt

Reverse Orientation, Right Angle, 8.0mm Height, Type 2

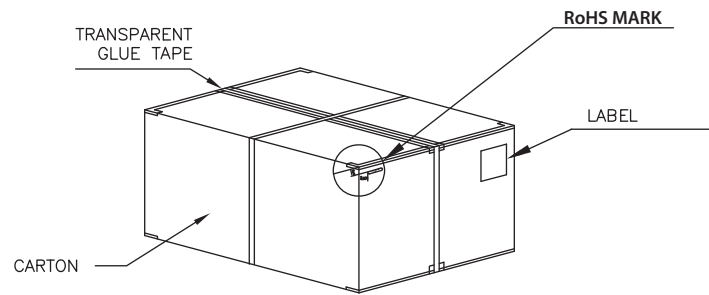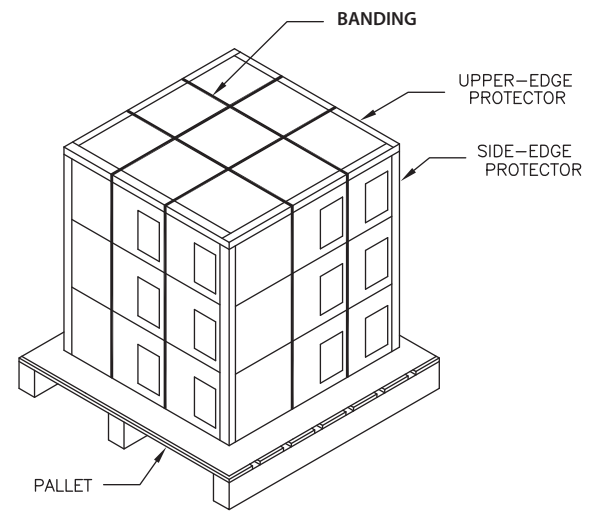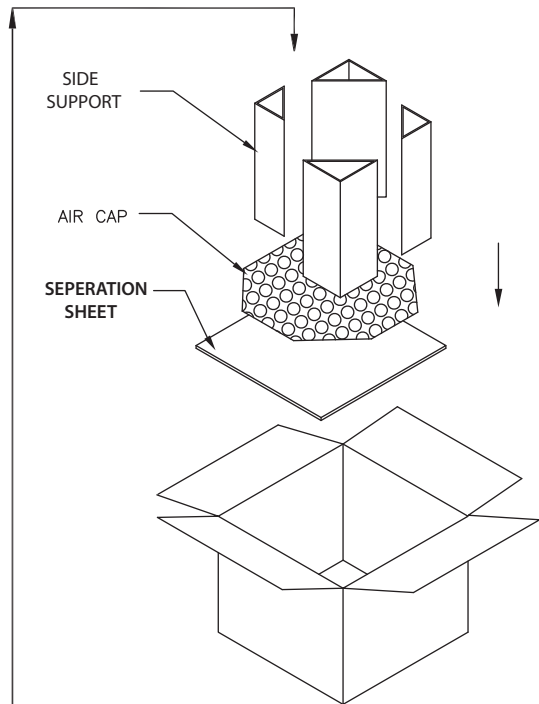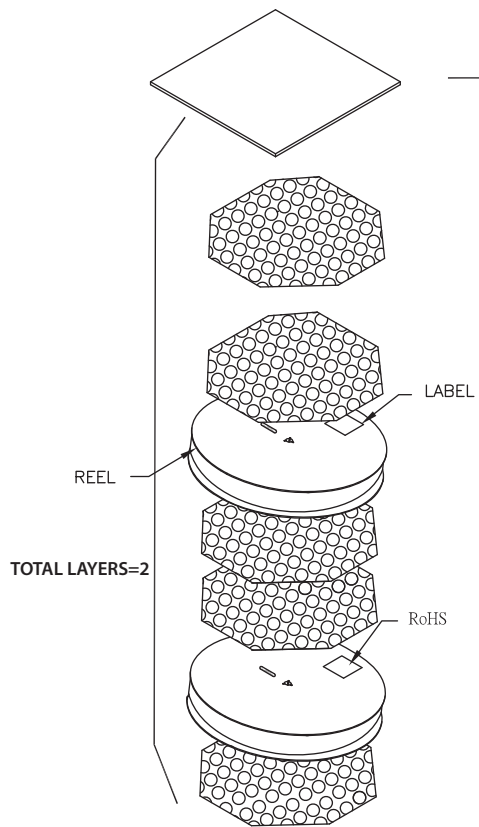

SMP TECHNOLOGY, INC.	
DDR SO DIMM Socket, 204 Position, 1.5 Volt	
Reverse Orientation, Right Angle, 8.0mm Height, Type 2	
P/N: B 0 3 0 - 2 0 4 3 - D 1 X X - Z	Pg: 5 of 5