




Recommended P.C.B Layout (Top Side)

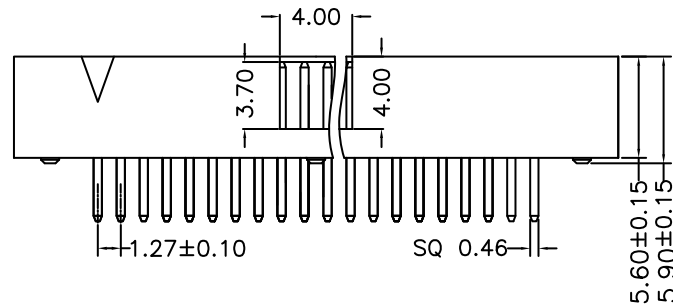

HOW TO ORDER:

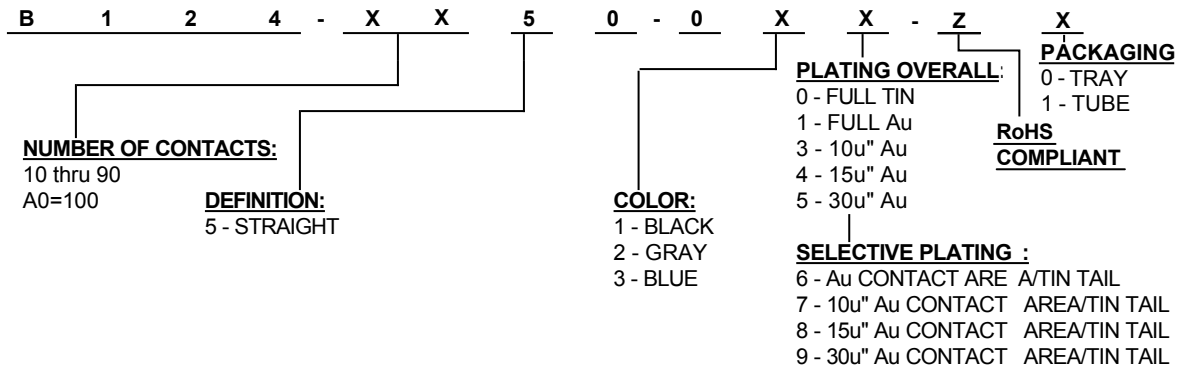

ELECTRICAL:

CURRENT RATING: 1.0 A
 CONTACT RESISTANCE: < 20m Ω
 INSULATOR RESISTANCE: > 1000M Ω
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.
 OPERATING TEMPERATURE: -40°C TO +105°C

MATERIAL:

INSULATOR: PA6T & 30% GLASS FIBER (UL94V-0)

| Rev | Drawn | Checked | Approved | Date | |
|-----------|-------------|--------------|---------------|-----------|---|
| 0 | A.M. | S.M. | S.M. | 02/01/96 | SMP TECHNOLOGY, INC. |
| A | B.S. | S.M. | S.M. | 08/04/08 | |
| | | | | | BOX HEADER , 1.27 x 2.54mm Pitch; Vertical; Thru Hole |
| TOL. DEC. | .X +/- 0.35 | .XX +/- 0.25 | .XXX +/- 0.15 | ANGLE +/- | UNIT: mm |
| | | | | | SERIES: B124-XX50-0XX-ZX |
| | | | | | Pg: 1 |