

ELECTRICAL:

CURRENT RATING: 1.5A
 CONTACT RESISTANCE:
 < 30 Milliohm Max.
 INSULATION RESISTANCE:
 > 1000 Megaohm Min. at 500DC
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V (rms) AC for 1 Minute
 OPERATING TEMPERATURE: -40°C to +85°C


MATERIAL:

INSULATOR: Nylon 9T
 CONTACTS: Phosphor Bronze
 CONTACT PLATING: Gold Plating over Nickel on Contact Area,
 Tin Plating over Nickel on PCB Tail
 SHELL: Copper Alloy

MECHANICAL

MAX PROCESS TEMP: 230°C for 30~60 Seconds
 260°C for 10 Seconds

HOW TO ORDER:

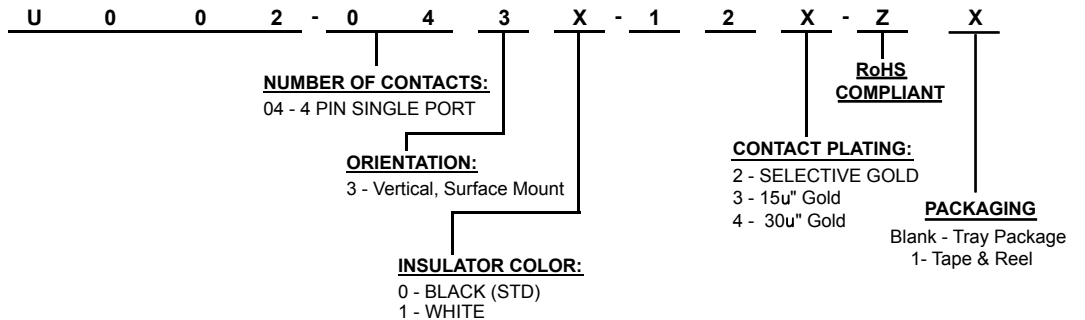

Rev	Description	Drawn	Checked	Approved	Date
0	Issued	WHS	S.M.	S.M.	6/08/06
A	Insulator Material Changes SHELL PLATING: Nickel 80-120m"	B.S.	S.M.	S.M.	3/01/10

SMP TECHNOLOGY, INC.


USB Connector 4 Pin, Type B, Vertical, Surface Mount,

SCALE N/A

TOL. DEC. .X +/- 0.30 .XX +/- 0.20 .XXX +/- 0.075 ANGLE +/- UNIT: mm

P/N: U002 - 043X-12X-Z

Tape and Reel Packaging

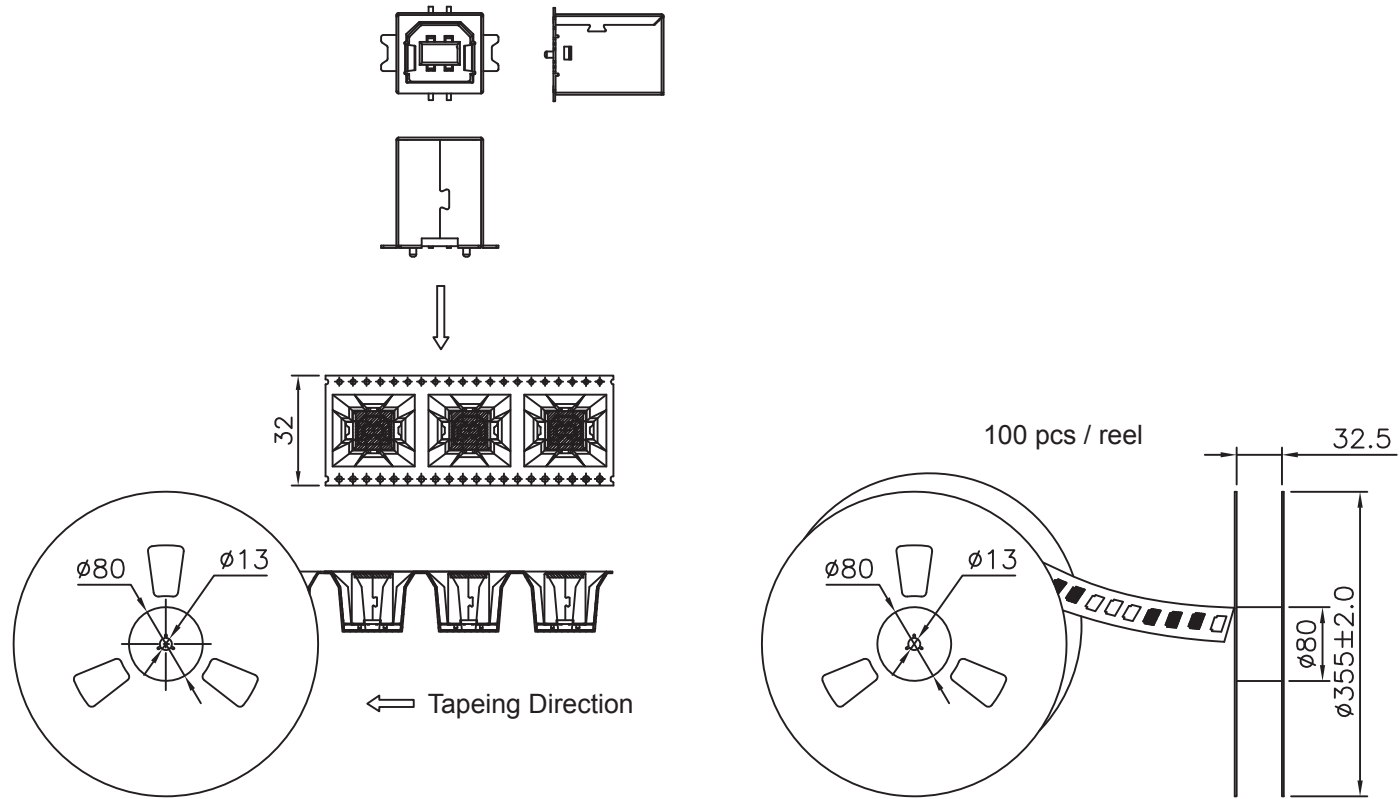

SMP TECHNOLOGY, INC.

USB Connector 4 Pin, Type B, Vertical, Surface Mount,