


**ELECTRICAL:**

CURRENT RATING: 1A  
 CONTACT RESISTANCE:  
 < 30 Milliohm Max.  
 INSULATION RESISTANCE:  
 > 1000 Mgeaohm Min.  
 DIELECTRIC WITHSTANDING VOLTAGE:  
 500V (rms) AC for 1 Minute  
 OPERATING TEMPERATURE: -25° C to +85° C

**MATERIAL:**

INSULATOR: Thermoplastic 30% Glass Filled, UL94V0  
 Blue (Pantone 300C)  
 CONTACTS: Phosphor Bronze  
 CONTACT PLATING:  
 Selective Gold Plating over Nickel on Contact Area,  
 Tin Plating on Terminal  
 SHELL: Copper Alloy  
 SHELL PLATING: Nickel

**HOW TO ORDER:**

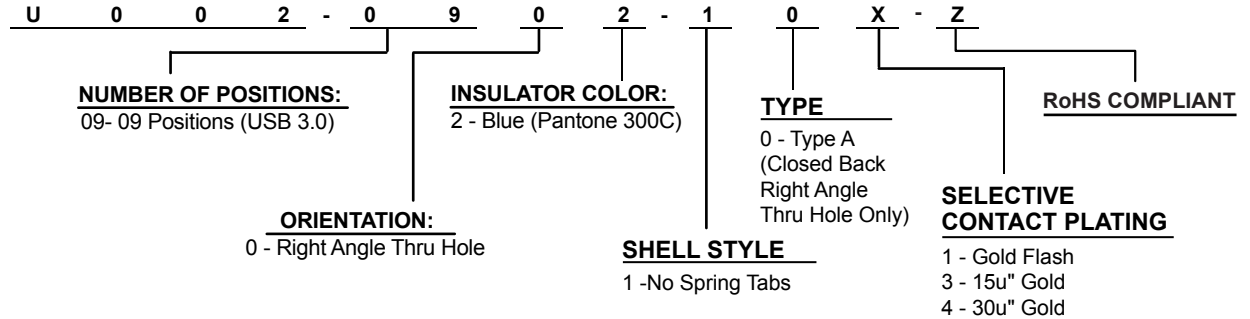

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	09/23/10

**SMP TECHNOLOGY, INC.**

USB 3.0 Connector, B Type, Female, 9 Position, Blue Insulator