


**ELECTRICAL:**  
 CURRENT RATING: 0.5A  
 CONTACT RESISTANCE:  
 < 30 Milliohm Max.  
 INSULATION RESISTANCE:  
 > 1000 Mgeaohm Min.  
 DIELETRIC WITHSTANDING VOLTAGE:  
 750V (rms) AC for 1 Minute  
 OPERATING TEMPERATURE: -55° C to +125° C

**MATERIAL:**  
 INSULATOR: Thermoplastic UL94V-0  
 CONTACTS: Phosphor Bronze  
 CONTACT PLATING:  
 Gold Plating over Nickel on Contact Area,  
 Tin Plating on Terminal  
 SHELL: Copper Alloy  
 SHELL PLATING: Nickel

**HOW TO ORDER:**

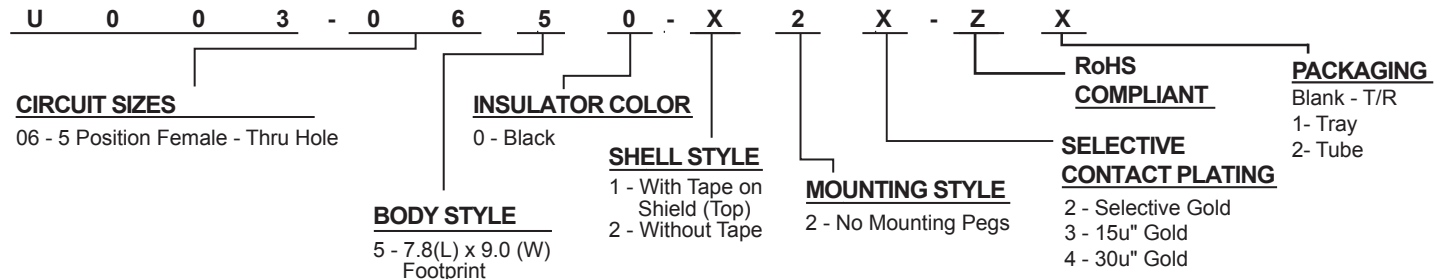

Rev	Drawn	Checked	Approved	Date
0	WHS	S.M.	S.M.	3/6/06
A	WHS	S.M.	S.M.	7/11/06
B	B.S.	S.M.	S.M.	6/11/14

**SMP TECHNOLOGY, INC.**

Mini USB, 5 Position, Right Angle Female, Thru Hole  
 No Mounting Pegs, 7.8 x 9.0 Profile

SCALE:n/a

TOL. DEC. .X +/- 0.30 .XX +/- 0.30 .XXX +/- 0.30 ANGLE +/- 3° UNIT: mm

P/N: U003-0650-X2X-ZX

Pg: 1