


ELECTRICAL:
 CURRENT RATING: 0.5A
 CONTACT RESISTANCE:
 < 30 Milliohm Max.
 INSULATION RESISTANCE:
 > 1000 Mgeaohm Min.
 DIELETRIC WITHSTANDING VOLTAGE:
 750V (rms) AC for 1 Minute
 OPERATING TEMPERATURE: -55° C to +125° C

MATERIAL:
 INSULATOR: LCP; 30% Glass Filled; UL94V-0; Black
 CONTACTS: Phosphor Bronze
 CONTACT PLATING:
 30u"Gold Plating over 50u"Nickel in Contact Area
 3~8u"Gold Plating on Solder Area of Terminal
 SHELL: Copper Alloy
 SHELL PLATING: 40u" Nickel

HOW TO ORDER:

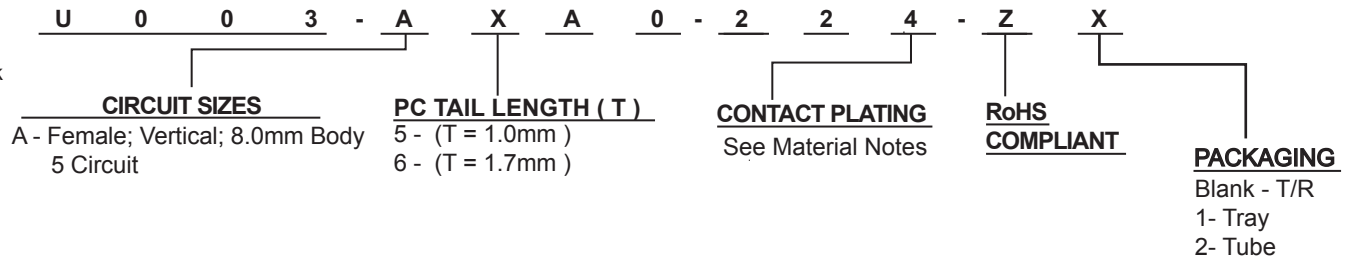

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	10/15/08
A	B.S.	S.M.	S.M.	10/27/08

SMP TECHNOLOGY, INC.

Mini USB, 5 Position, Vertical, Surface Mount