



Recommended PCB Layout With Mounting Pegs

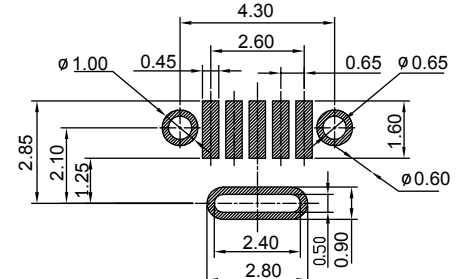

Recommended PCB Layout Without Mounting Pegs

HOW TO ORDER:

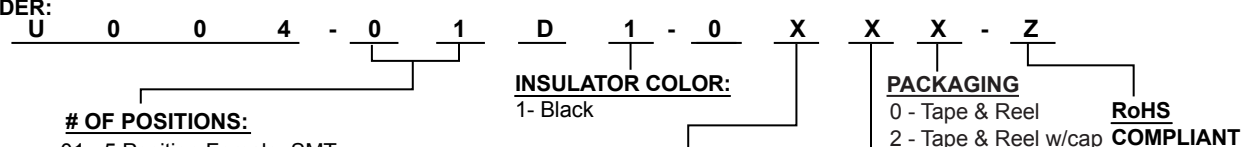

OF POSITIONS:
01 - 5 Position Female, SMT

INSULATOR COLOR:
1 - Black

MOUNTING OPTION:
1 - Without Mounting Pegs
7 - With Mounting Pegs

PACKAGING
0 - Tape & Reel
2 - Tape & Reel w/cap
3 - Tube
RoHS COMPLIANT

CONTACT AREA PLATING
0 - 7μ" Au
1 - 15μ" Au
2 - 30μ" Au
3 - 50μ" Au

MATERIALS:
HOUSING: High Temperature Thermoplastic, UL94-VO
COLOR: Black
CONTACTS: Phosphor Bronze
SHELL: Stainless Steel
TEMPERATURE RANGE: -40°C to +105°C

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	12/08/14
A	B.S.	S.M.	S.M.	04/16/15

SMP TECHNOLOGY, INC.

Micro USB, 5 Position, Vertical Receptacle, Surface Mount with Thru Hole Shell Legs

Tolerance : Dimension .X +/- 0.20 .XX +/- 0.10 .XXX +/- 0.05

SERIES: U004-01D1-0XXX-Z